

Magnum - 801 Series

Size 8 Cavity Optoelectronic PCB Insert, 1.25mm, 850nm - Arinc 801, 803 & 804 Compliant - Front Release

Front Release Optical Receiver Insert

FEATURES

- Compliant with Arinc 664, 801, 803, 804 & 818
- Suitable for Fast Ethernet, Gigabit Ethernet, 1x/2x/4x Fibre Channel and sFPDP applications from 125Mbps to 4.25Gbps
- Maximum optical channel bit error rate less than 1×10^{-12}
- Operating temperature range from -40°C to $+85^{\circ}\text{C}$
- Shock and vibration resistant per RTCA / D0-160E
- Arcap contact insert material meets stringent EMI / RFI / ESD & EMP performance specifications
- Six pin PCB footprint with Loss of Signal (LOS) functions
- 1.25mm ceramic optical fiber receptacle connector interface per ARINC 801
- Compatible with Arinc 600 and MIL-STD-83527 size 8Q (Quadrax) insert cavities

APPLICATIONS

Magnum - 801 series printed circuit board mounted optical receivers enable high speed network communications over long distances in harsh environments.

- Fast or Gigabit Ethernet switches and peripherals
- Fibre Channel switches and peripherals
- Serial Rapid I/O (sRIO) interfaces
- sFPDP data links
- Video displays

This size 8Q Optoelectronic cavity insert provides a rugged optical interface that is compliant with ARINC 801 1.25mm ceramic optical ferrules.

The multimode optical fiber interface supports applications where copper cable link distance, bandwidth, weight or bulk make the use of twisted pair, twinax or quadrax copper conductors unacceptable.

US Pat. # 7,690,849



ARINC 801 / 1.25mm Ferrule / PCB Mounted

DESCRIPTION

Magnum - 801 series Optoelectronic size 8 cavity PCB insert receivers consist of optoelectronic receiver functions integrated into a printed circuit board mounted pin contact. The optical receivers are 850nm PIN diodes + integrated limiting amplifiers. Outputs from the receivers consist of differential CML data signals on the receiver (RX+ and RX-) lines. A CMOS output signal is generated on the Loss of Signal (LOS) line upon loss of a valid incoming optical data. The receiver data lines are squelched upon LOS assertion, preventing errant data generation when an invalid incoming optical signal is presented to the optical receiver.

The optical mating interface to the Magnum series size 8 cavity insert optical receivers is a 1.25mm ceramic fiber optic receptacle per ARINC 801. The Magnum optical receiver insert has an integral 62.5/125µ multimode optical fiber stub enabling it to interface to either 62.5/125µ or 50/125µ optical fiber cable.

The electrical interface to the Magnum - 801 series size 8 cavity insert optical receivers is a six position pin header suitable for thru-hole soldering to a flexible or rigid printed circuit.

Magnum series size 8 cavity insert optical receivers are vibration isolated, environmentally hardened components designed for use in harsh environment applications.

ORDERING INFORMATION

Application	Part Number
50Mbps to 3.19Gbps	P44F-RS1E-LK
3.2Gbps to 5.0Gbps	P44F-RS1G-LK

Magnum Series, 1.25mm Ferrule, Size 8 Cavity Insert, Optical Receiver,
Multimode, 850nm, Arinc 664, 818, 801, 803 & 804 Compliant

ABSOLUTE MAXIMUM RATINGS

Absolute maximum limits mean that no catastrophic damage will occur if the product is subjected to these ratings for short periods, provided each limiting parameter is in isolation and all other parameters have values within the performance specification. It should not be assumed that limiting values of more than one parameter can be applied to the product at the same time.

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Storage Temperature	T_s	-55		+100	°C
Supply Voltage	V_{cc}	-0.5		+4.5	V
RX Output Current	I_o			50	mA

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Temperature	T_A	-55		+85	°C
Power Supply Voltage	V_{cc}	+3.135		+3.465	V
Power Supply Noise (p-p)	N_p			200	mV

SPECIFICATIONS COMPLIANCE

Requirement	Feature	Condition	Notes
RTCA / D0-160E	ESD	Class II	2200V
RTCA / D0-160E	Vibration	3.8g ² /Hz	43G rms
RTCA / D0-160E	Shock	40.0g	6-9mS
RTCA / D0-160E	Flame Resistance	Method 1012	30 Seconds
RTCA / D0-160E	Damp Heat	10 Cycles	24 Hours
ARINC 801	Mating Durability	500 Cycles	<0.5dB Change
FDA / CDRH / IEC-825-1	Eye Safety	Class 1	No Safety Interlocks Required

MATERIALS

Item	Detail	Notes
Insert	Arcap	
Solder Pins	Brass	
Solder Pin Plating	Gold	
Ferrule	Ceramic	
Printed Circuits	Polyimide / FR-4	

Magnum Series, 1.25mm Ferrule, Size 8 Cavity Insert, Optical Receiver,
Multimode, 850nm, Arinc 664, 818, 801, 803 & 804 Compliant

OPTICAL RECEIVERS T_A = Operating Temperature Range, V_{CC} = 3.135V to 3.465V

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Sensitivity (BER<10 ⁻¹² , ER=9.0) xxxx-xxxE-xx @ 50Mbps to 1.25Gbps xxxx-xxxE-xx @ 2.125Gbps xxxx-xxxE-xx @ 2.5Gbps to 3.19Gbps xxxx-xxxG-xx @ 3.2Gbps to 5.0Gbps	P_I	-17.0 -15.0 -15.0 -14.0		0.0	dBm
Optical Wavelength	λ_{IN}	830		860	nM
Optical Modulation Amplitude (ER=9.0, p-p) xxxx-xxxE-xx @ 50Mbps to 1.25Gbps xxxx-xxxE-xx @ 2.125Gbps xxxx-xxxE-xx @ 2.5Gbps to 3.19Gbps xxxx-xxxG-xx @ 3.2Gbps to 5.0Gbps	OMA	31 49 56 61			μ W
CML Differential Output Voltage (p-p)	V_{Diff}	600	780	1200	mV
Loss of Signal (LOS) Deassert Level	P_{OFFr}	-28.0			dBm
Loss of Signal (LOS) Hysteresis	HYS	1.5	2.25	3.5	dB


POWER SUPPLY CURRENT T_A = Operating Temperature Range, V_{CC} = 3.135V to 3.465V

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Supply Current per receiver	I_{cct}		80	110	mA

Magnum Series, 1.25mm Ferrule, Size 8 Cavity Insert, Optical Receiver,
Multimode, 850nm, Arinc 664, 818, 801, 803 & 804 Compliant

OUTLINE DRAWING

Dimensions are shown as: inches (mm)

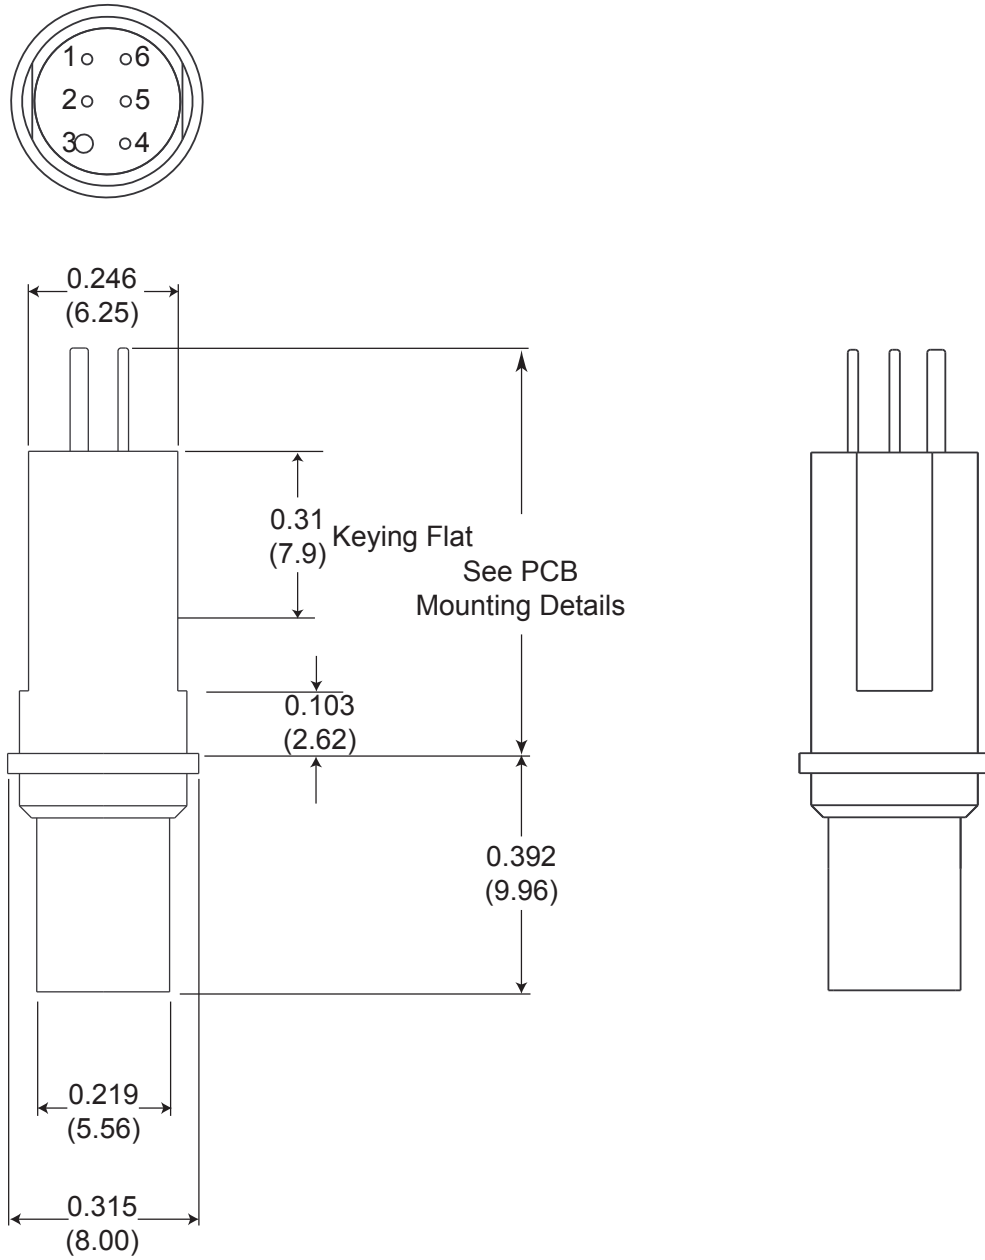

Magnum Series, 1.25mm Ferrule, Size 8 Cavity Insert, Optical Receiver,
Multimode, 850nm, Arinc 664, 818, 801, 803 & 804 Compliant

ELECTRICAL PIN ASSIGNMENTS


Magnum Size 8 Cavity Insert

Pin Number	Symbol	Description	Logic Family
1	GND	Ground	N/A
2	V _{cc}	Power Supply - Input	N/A
3	GND	Ground	N/A
4	LOS	Loss of Signal - Output Satisfactory Optical Input: Logic "0" Output Unsatisfactory Optical Input: Logic "1" Output	Open Drain CMOS
5	RX-	Receiver Data - Input	CML
6	RX+	Receiver Data - Input	CML

PRINTED CIRCUIT BOARD FOOTPRINT

Dimensions are shown as: inches


PCB Hole Pattern Mounting Side View

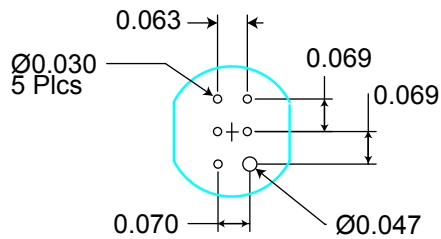

Magnum Series, 1.25mm Ferrule, Size 8 Cavity Insert, Optical Receiver,
Multimode, 850nm, Arinc 664, 818, 801, 803 & 804 Compliant

PCB MOUNTING DETAILS

Dimensions are shown as: inches [mm]

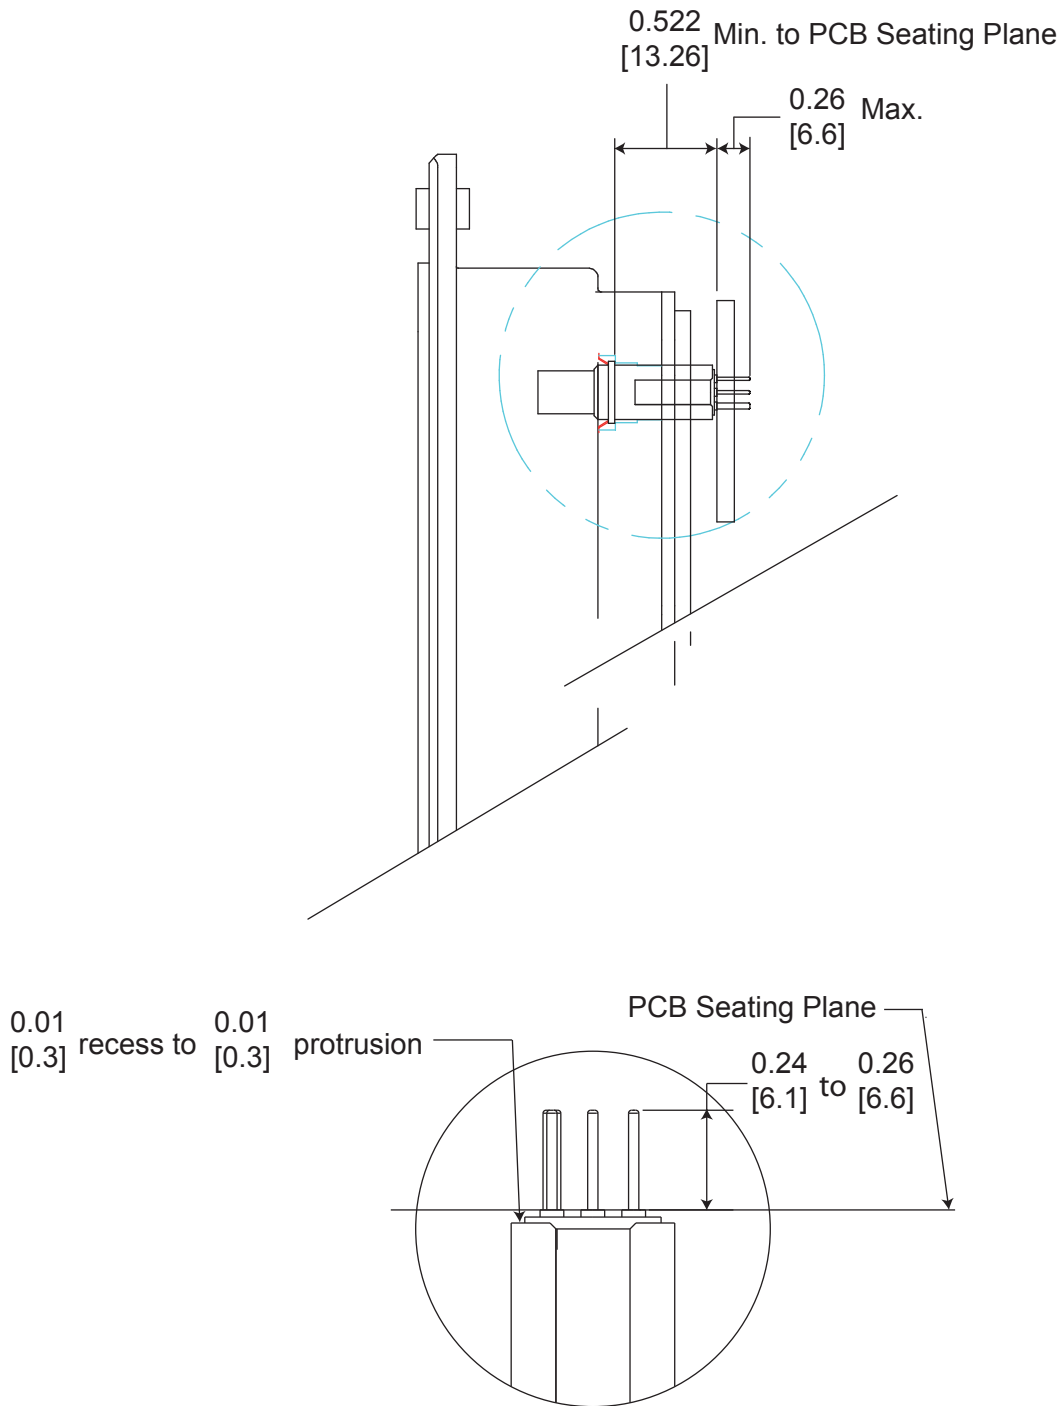


Magnum Series, 1.25mm Ferrule, Size 8 Cavity Insert, Optical Receiver,
Multimode, 850nm, Arinc 664, 818, 801, 803 & 804 Compliant

APPLICATION SCHEMATIC

For Xilinx Rocket I/O Interfaces

Optical Receivers

Xilinx Rocket I/O

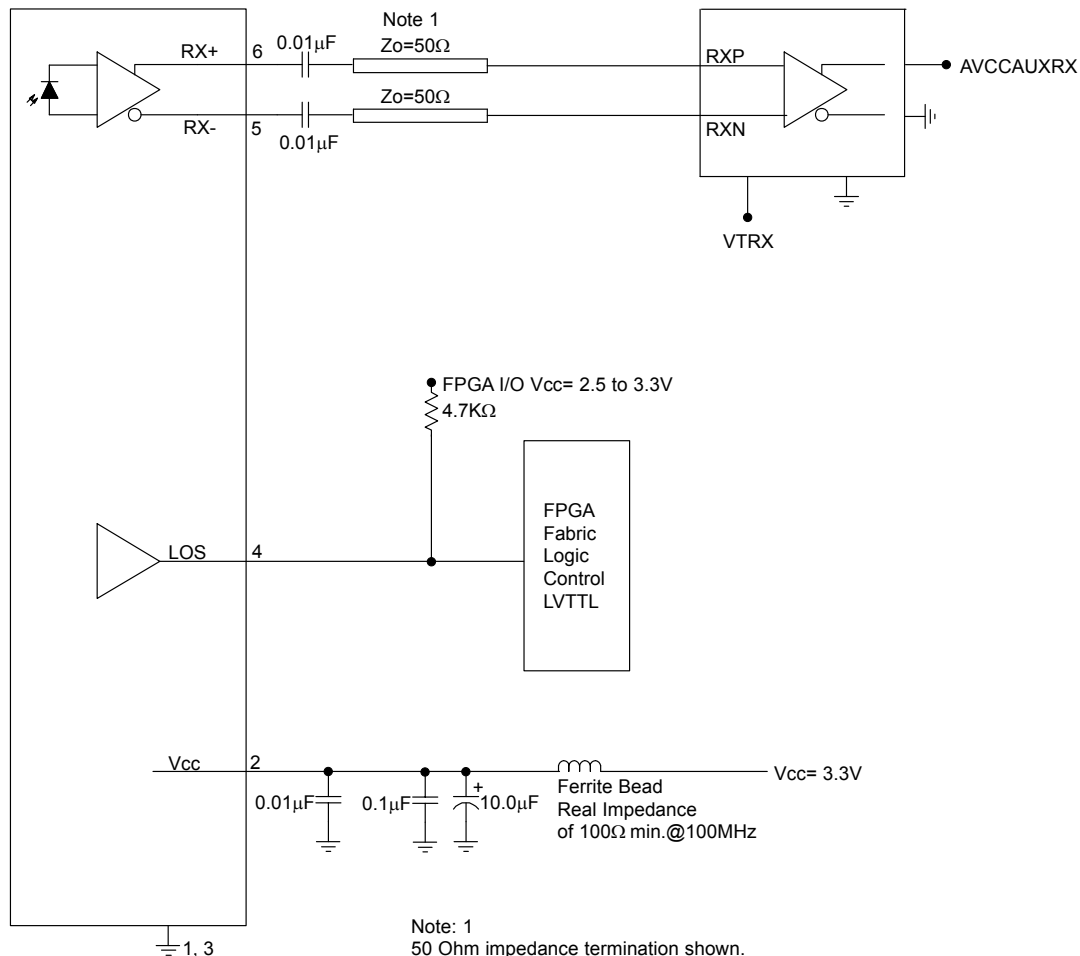

Typical application schematic shown
For alternate applications or termination
techniques, please consult the Factory

All Protokraft statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and Protokraft assumes no responsibility for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. Protokraft reserves the right to change at any time, without prior or subsequent notice, the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. Protokraft makes no representations that the products herein are free from any intellectual property claims of others. Protokraft and the Protokraft logo are trademarks of Protokraft, LLC. Other trademarks are the property of their respective holders. Contact Protokraft for prices and availability. For the most recent version of this data sheet, please go to the Protokraft website at <http://www.protokraft.com>. In case of discrepancy, the web version takes precedence over any printed literature. ©2004 Protokraft, LLC. All rights reserved.



192 Bob Fitz Road, Johnson City, TN 37615
salesmp@moog.com
moogprotokraft.com