

# Mustang Series

Gigabit Ethernet, TFOCA II®,  
1000Base-T/SX Media Converter,  
Multimode, 850nm, 3.3VDC

## Dual Port, Jam Nut

### FEATURES

- Compliant with IEEE-802.3:2005 Gigabit Ethernet 1000Base-T and 1000Base-SX
- Optical fiber link distances up to 550 Meters
- Copper link distances up to 100 Meters (EIA/TIA Cat-5E)
- Operating temperature range from -40°C to +85°C
- Shock, vibration and immersion resistant per MIL-STD-810
- Zinc Nickel plating meets stringent corrosion resistance specifications
- Aluminum housings are strong, durable and light weight
- TFOCA II® compliant optical fiber connector interface
- Samtec SMT electrical connector for simple interface to backplanes or motherboards

### APPLICATIONS

Mustang series bulkhead mounted Gigabit Ethernet media converters enable high speed network communications over long distances in harsh environments.

- Gigabit Ethernet switches and peripherals
- Telecom and datacom switch / router rack-to-rack links
- Storage or computation clusters

The TFOCA II® shell provides a sealed optical interface that is water-tight to MIL-STD-810 when mated.

The multimode optical fiber interface supports applications where copper cable link distance, bandwidth, weight or bulk make the use of twisted pair, twinax or quadrx copper conductors unacceptable.

\*TFOCA-II® is a registered trademark of Amphenol Fiber Systems International.



### TFOCAII® to Samtec SMT Optical to Electrical Media Converter

### DESCRIPTION

Mustang series Gigabit Ethernet media converters consist of optoelectronic transmitter and receiver functions integrated along with the 1000Base-T electrical to 1000Base-SX optical media conversion circuitry into a jam-nut TFOCA II® fiber optic connector assembly.

The optical transmitters are high output 850nm devices. The optical receivers consist of GaAs PIN and preamplifier assemblies and limiting post-amplifiers.

The electrical interface to the Mustang series optical media converters is a Samtec SMT electrical connector for interface to backplanes or motherboards.

Mustang series Gigabit Ethernet media converters are vibration isolated, environmentally hardened components designed for use in harsh environment applications.

- Sealed against liquid and solid contaminants
- Shock and vibration resistant

### ORDERING INFORMATION

Application	Product Number
Dual Port 1000Base-T / SX - 3.3VDC	P51J-4S1T-Fx-Lxxx
See page 10 for standard part number / cable length options	

Dual Port Mustang Series \*TFOCA II® Connector, 1000Base-T to  
1000Base-SX Media Converter, Multimode, 850nm

## ABSOLUTE MAXIMUM RATINGS

Absolute maximum limits mean that no catastrophic damage will occur if the product is subjected to these ratings for short periods, provided each limiting parameter is in isolation and all other parameters have values within the performance specification. It should not be assumed that limiting values of more than one parameter can be applied to the product at the same time.

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Storage Temperature	$T_s$	-55		+100	°C

## RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Temperature	$T_A$	-40		+85	°C
Supply Voltage	$V_{CC}$	+3.135		+3.465	V
Power Supply Noise (p-p)	$N_p$			200	mV

## SPECIFICATIONS COMPLIANCE

Requirement	Feature	Condition	Notes
MIL-STD-883	ESD	Class II	2200V
MIL-STD-810	Vibration	3.8g <sup>2</sup> /Hz	43G rms
MIL-STD-810	Shock	40.0g	6-9mS
MIL-STD-810	Immersion	1.0 meter	2 .0Hours
MIL-STD-1344	Flame Resistance	Method 1012	30 Seconds
MIL-STD-1344	Damp Heat	10 Cycles	24 Hours
FDA / CDRH / IEC-825-1	Eye Safety	Class 1	No Safety Interlocks Required

## MATERIALS

Item	Detail	Notes
Shell	Aluminum Alloy	
Shell Plating	OD CD, Nickel Zinc Nickel	SAE-AMS-2417
Insert	Aluminum Alloy	
Interfacial Seal	Elastomer	
Alignment Sleeves	Zirconia	
Printed Circuits	FR-4	

Dual Port Mustang Series \*TFOCA II® Connector, 1000Base-T to  
1000Base-SX Media Converter, Multimode, 850nM

**TRANSMITTERS**  $T_A$  = Operating Temperature Range,  $V_{cc}$  = Operating Voltage Range

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Output Power	$P_o$	-9.5		-3.0	dBm
Optical Output Wavelength	$\lambda_{OUT}$	830	850	860	nM

**RECEIVERS**  $T_A$  = Operating Temperature Range,  $V_{cc}$  = Operating Voltage Range

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Sensitivity	$P_i$	-17.0		0.0	dBm
Optical Wavelength	$\lambda_{IN}$	700		900	nM

**SUPPLY CURRENT**  $T_A$  = Operating Temperature Range,  $V_{cc}$  = Operating Voltage Range

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Supply Current per Port	$I_{CCT}$		400	500	mA


**OPTICAL FIBER LINK DISTANCES**

Application	Fiber Specification	Distance
Gigabit Ethernet - 1000Base-SX IEEE 802.3:2005	62.5/125 $\mu$ MMF	275M
	50/125 $\mu$ MMF	550M

Dual Port Mustang Series \*TFOCA II® Connector, 1000Base-T to  
1000Base-SX Media Converter, Multimode, 850nm

**Outline Dimensions**

Dimensions are shown as: inches (mm)

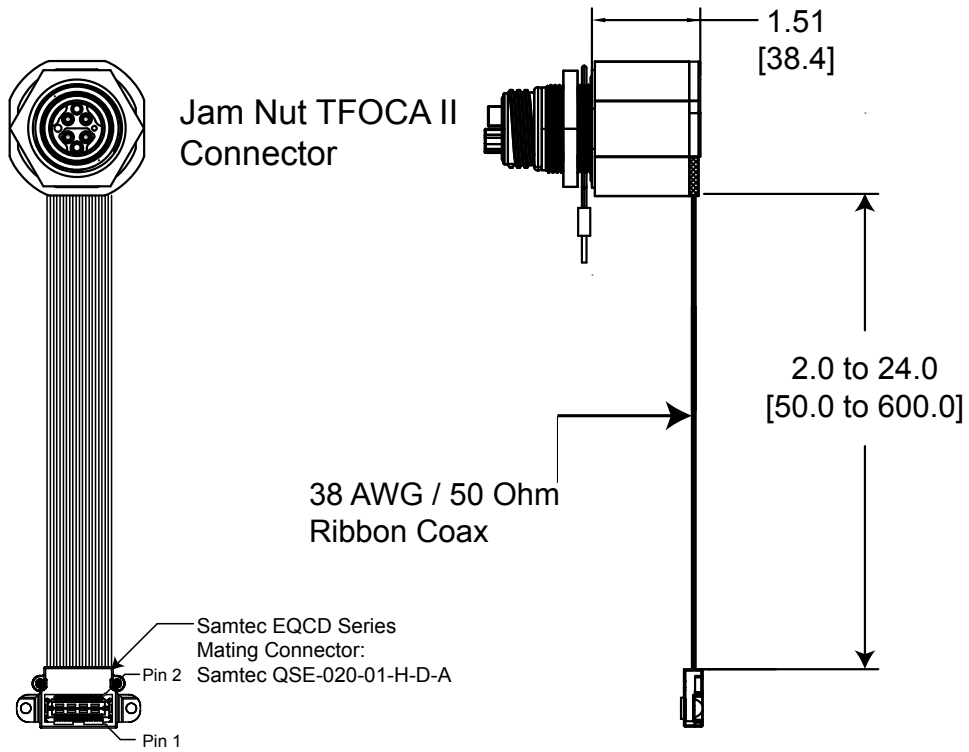


Part Number = P51J-xxxx-xx-Lxxx\*

\* See page 7 for standard cable length options

**TFOCA II Panel Cutout Dimensions**


Rear Panel Mounting Only

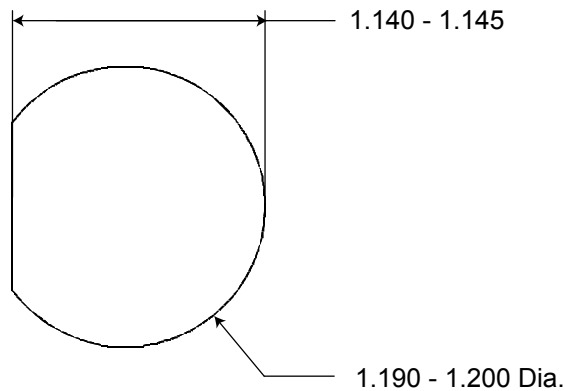

Dual Port Mustang Series \*TFOCA II® Connector, 1000Base-T to  
1000Base-SX Media Converter, Multimode, 850nm

## MEDIA CONVERTER OPTICAL INSERT PIN / Port ARRANGEMENT

### TOP Optical Interface

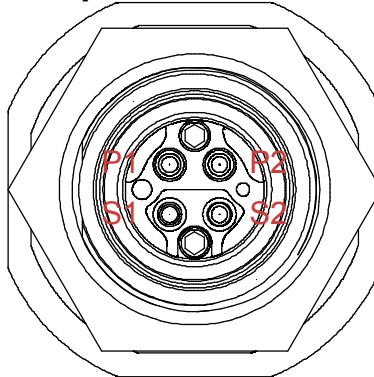

Front view of the TFOCA II media converter optical insert shown - fiber optic cable plug opposite - see Appendix A1 for details


### Optical Pin / Port Assignments

Port Number	RX	TX
0	P2	S2
1	P1	S1

Dual Port Mustang Series \*TFOCA II® Connector, 1000Base-T to  
1000Base-SX Media Converter, Multimode, 850nm

**PRINTED CIRCUIT BOARD FOOTPRINT**

All dimensions shown are for reference only: inches [mm]

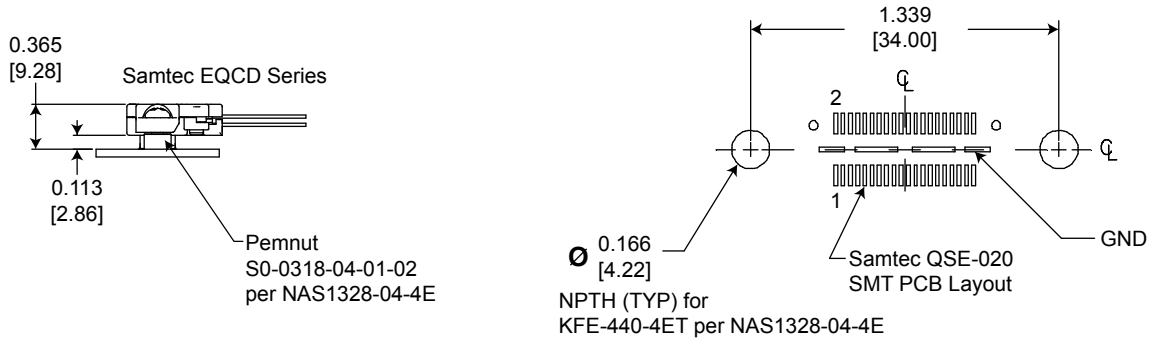

**Samtec EQCD PIN ASSIGNMENTS**


PIN #	PORT #	FUNCTION	Input / Output	RJ-45 PIN#	Logic Family
1	0	MDA+	Input / Output	1	IEEE-802.3:2005 1000Base-T
2	1	MDA+	Input / Output	1	IEEE-802.3:2005 1000Base-T
3	0	MDA-	Input / Output	2	IEEE-802.3:2005 1000Base-T
4	1	MDA-	Input / Output	2	IEEE-802.3:2005 1000Base-T
5	0	MDB+	Input / Output	3	IEEE-802.3:2005 1000Base-T
6	1	MDB+	Input / Output	3	IEEE-802.3:2005 1000Base-T
7	0	MDB-	Input / Output	6	IEEE-802.3:2005 1000Base-T
8	1	MDB-	Input / Output	6	IEEE-802.3:2005 1000Base-T
9	0	MDC+	Input / Output	4	IEEE-802.3:2005 1000Base-T
10	1	MDC+	Input / Output	4	IEEE-802.3:2005 1000Base-T
11	0	MDC-	Input / Output	5	IEEE-802.3:2005 1000Base-T
12	1	MDC-	Input / Output	5	IEEE-802.3:2005 1000Base-T
13	0	MDD+	Input / Output	7	IEEE-802.3:2005 1000Base-T
14	1	MDD+	Input / Output	7	IEEE-802.3:2005 1000Base-T
15	0	MDD-	Input / Output	8	IEEE-802.3:2005 1000Base-T
16	1	MDD-	Input / Output	8	IEEE-802.3:2005 1000Base-T
17	0	*Reset_Low	<u>Input</u>	N/A	LVTTTL with Internal Pullup
18	1	*Reset_Low	<u>Input</u>	N/A	LVTTTL with Internal Pullup
19	0-1	V <sub>CC</sub>	Input	N/A	3.135 to 3.465VDC
20	0-1	V <sub>CC</sub>	Input	N/A	3.135 to 3.465VDC
21	0-1	V <sub>CC</sub>	Input	N/A	3.135 to 3.465VDC
22	0-1	V <sub>CC</sub>	Input	N/A	3.135 to 3.465VDC

\*Reset Function: Logic "0" Input = Restart, registers initialized; Logic "1", Open or High Z Input = Normal Operation, center slug is Ground, all other pins are N/C

Dual Port Mustang Series \*TFOCA II® Connector, 1000Base-T to  
1000Base-SX Media Converter, Multimode, 850nm

## OUTLINE DRAWING

Cable Length Options

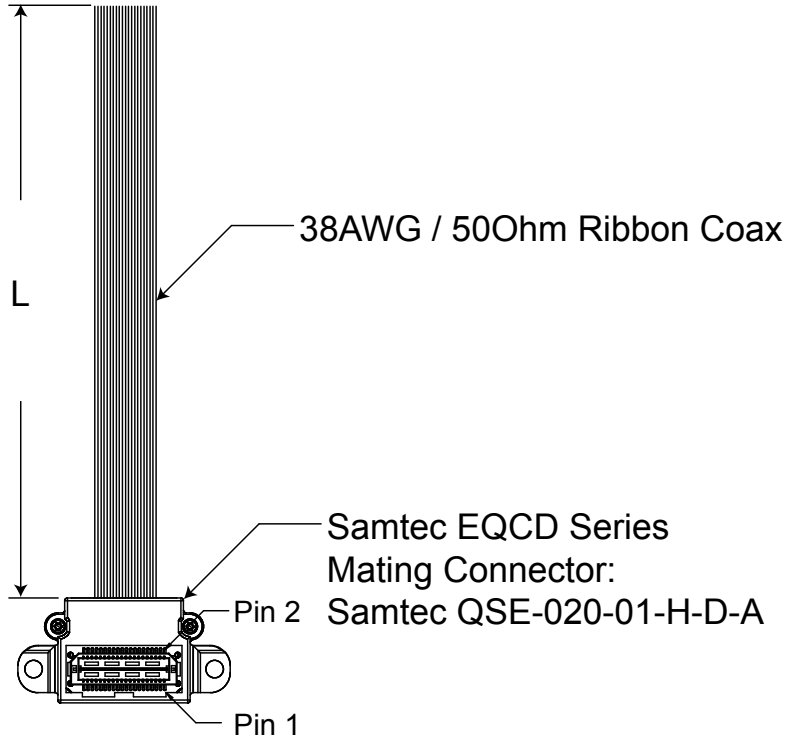


### Ribbon Coax Cable Length Options

L (mm) +/- 6.0	ITEM #
50	xxxx-xxxx-xx-L050
100	xxxx-xxxx-xx-L100
150	xxxx-xxxx-xx-L150
200	xxxx-xxxx-xx-L200
250	xxxx-xxxx-xx-L250

Dual Port Mustang Series \*TFOCA II® Connector, 1000Base-T to  
1000Base-SX Media Converter, Multimode, 850nm

## OUTLINE DRAWING

Cable Length Options

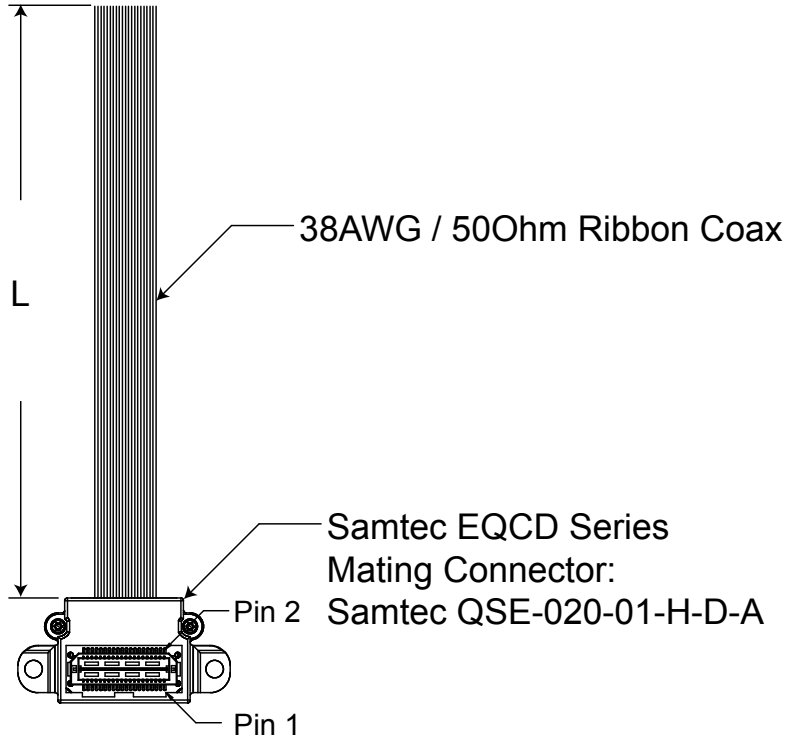

### Ribbon Coax Cable Length Options

L (mm) +/- 6.0	ITEM #
50	xxxx-xxxx-xx-L050
100	xxxx-xxxx-xx-L100
150	xxxx-xxxx-xx-L150
200	xxxx-xxxx-xx-L200
250	xxxx-xxxx-xx-L250



192 Bob Fitz Road, Johnson City, TN 37615  
salesmp@moog.com  
moogprotokraft.com




Dual Port Mustang Series \*TFOCA II® Connector, 1000Base-T to  
1000Base-SX Media Converter, Multimode, 850nm

## APPENDIX A1

### TFOCA-II® 4 Channel Fiber Optic Cable Plug

Dimensions are shown as: inches

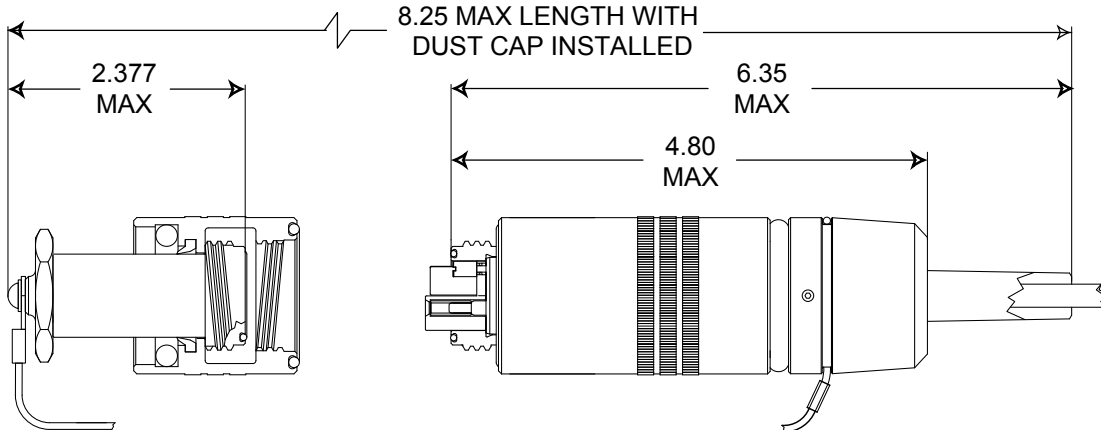


### Amphenol Fiber Systems International® TFOCA-II® 4-Channel Connector Part Numbers\*

\*Contact Amphenol Fiber Systems International for more information

### TFOCA II® RECEPTACLE PROTECTION CAPS

RECEPTACLE CAP P/N

Contact Amphenol Fiber Systems International



Dual Port Mustang Series \*TFOCA II® Connector, 1000Base-T to  
1000Base-SX Media Converter, Multimode, 850nm

## APPENDIX A1 PART NUMBER OPTIONS

**P51 J - 4 S 1 T - F x x - L**



192 Bob Fitz Road, Johnson City, TN 37615  
salesmp@moog.com  
moogprotokraft.com